

The sanitary no-touch activation sensor has a 20 second shut off timer and the Green Ticker counts the number of bottles saved from waste.

Product features

- Bi-level refrigerated fountains
- Wheelchair-accessible design
- Sanitary no-touch sensor activation
- Green Ticker™ counts bottles saved from waste

Technical Details


Finish	Stainless Steel		
Power	220V/50Hz		
Drinking fountain style	SwirlFlo with Flexi-Guard Safety		
Mounting type	Wall	Mount	(Inwall
Dimensions (L x W x H)	Frame/Plate) 977.9 L x 482.6 W		
Approx. Shipping Weight	x 863.6 H		
	53.5 kg		



WaterMark Certified (Certificate number: 023305)

The WaterMark Certification Scheme (Scheme) is a mandatory certification scheme for plumbing and drainage products to ensure they are fit for purpose and appropriately authorised for use in plumbing and drainage installations.



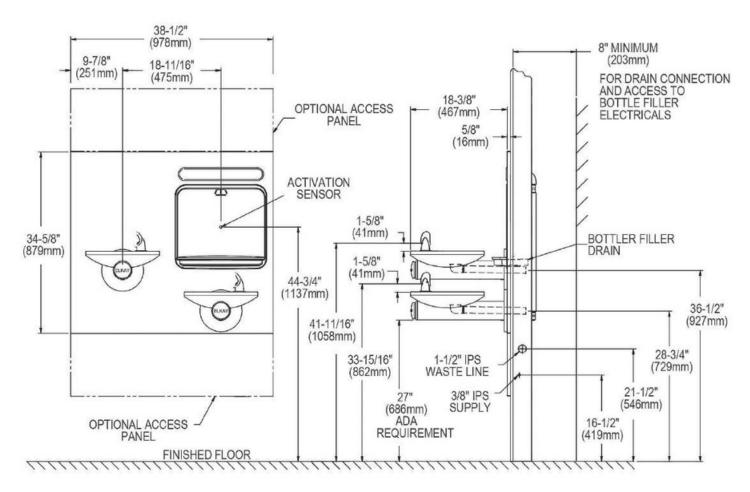

NOTE: New installations must use ground fault circuit interrupter (GFCI). It is highly recommended that the circuit be dedicated and the load protection be sized for 20amps.



Issued: May 2021